

# Wood Clear Coat Scheme

**International.**  
yachtpaint.com

A fast drying, high gloss system which is burnishable to give a long-lasting superior finish. Frequently used by leading wooden boat builders, this scheme allows multiple coats to be applied in one day, and the flexibility of any gloss level through the use of the Polyurethane Matting agent.

## Benefits


- Scheme has an extensive track record within major wooden boat building companies
- High gloss, polyurethane based scheme
- Clear Wood Sealer (Fast) has a very short drying and overcoating time allowing multiple coats to be applied on one day
- Full scheme can be applied in just two days (9 coats inc. sanding)
- The Interspray 800 Glazecoat is burnishable to maintain that high gloss finish
- Any gloss level can be achieved, from high gloss to satin, through the use of Polyurethane Matting agent
- A tough durable scheme that has exceptional impact, scratch and wear resistance
- Scheme is suitable for both interior and exterior use (excellent gloss retention)



## Typical Scheme

- |    |                                    |                      |
|----|------------------------------------|----------------------|
| 1. | Clear Wood Sealer (Fast) - Thinned | 1ct @ 25 microns/ct  |
| 2. | Clear Wood Sealer (Fast)           | 4cts @ 35 microns/ct |
| 3. | Interspray 800 Glazecoat           | 4cts @ 30 microns/ct |

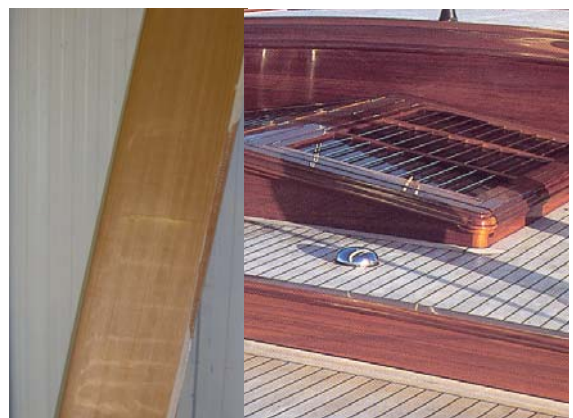

Note:- Above figures given as an example of a typical scheme only



## Substrates

- Wood

## Product attributes\*

Product	Benefits	Spreading rates
<p>1. Clear Wood Sealer (Fast)</p> 	<ul style="list-style-type: none"> <li>Premium clear, two-pack polyurethane primer</li> <li>Fast drying - up to 4 coats to be applied in 1 day<sup>#</sup>.</li> <li>Suitable for use on both interior and exterior surfaces (above waterline)</li> <li>Exceptional impact, scratch and wear resistance</li> <li>Applied by Brush, Roller, Conventional Spray</li> </ul>	6.6m <sup>2</sup> /L
<p>2. Interspray 800 Glazecoat</p> 	<ul style="list-style-type: none"> <li>Acrylic polyurethane technology</li> <li>High gloss finish</li> <li>Excellent durability</li> <li>Fast drying</li> <li>Durable</li> <li>2 hardeners available - allows application over a wide range of temperatures and flexibility with application on different boat sizes.</li> <li>"Repairable" finish coating</li> <li>Buffable</li> <li>Variety of gloss levels can be achieved by mixing with Polyurethane Matting additive</li> <li>Applied by Airmix, Conventional Spray, HVLP Spray</li> </ul>	7.7m <sup>2</sup> /L


<sup>#</sup> at 23°C/73°F unthinned

\* Further information for the application of this product can be found on the relevant datasheet

### The following assumptions have been made:-

- No thinners volumes (as necessary for application purposes) have been included
- Clear Wood Sealer (Fast) spreading rates based on conventional spray application
- Interspray 800 Glazecoat spreading rates based on conventional spray application

We have taken reasonable care in preparing this document and in collecting and preparing material for inclusion in it but do not represent or warrant that it is free from error or that the information content is complete or accurate. The statements and recommendations are advisory only and all advice and products are provided on the terms set out in our standard Conditions of Sale.

Akzo Nobel Logo, ®, International®, and other products mentioned in this document are trademarks of or licensed to Akzo Nobel. © Akzo Nobel 2005